

Universal finger + rope jump off protection for traction sheaves + diverter pulleys

Construction according to EN 81-20 5.5.7



Suitable for traction sheave



With extension plates suitable for traction sheave width



Description

The universal finger and rope jump off protection substantially decreases the danger of accidentally grabbing into rotating parts.



The arched cutouts are suitable to prevent shearing points. High form stability by means of double angle fixation.

The protection is suitable for different traction sheave widths and rope departures.

Diameter of traction sheave




Double angle fixation

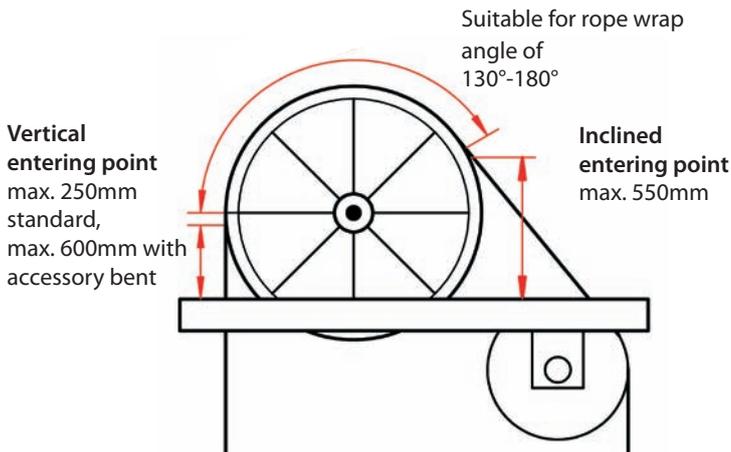

Not suitable for traction sheaves with a flanged wheel.

Suitable entering points overview:

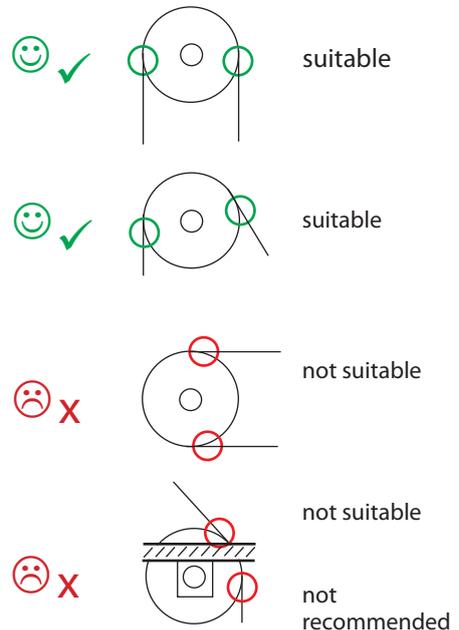


Advice:
Please note the advice „Protective covers on rotating parts“ on page 178.



Scope of delivery


for bilateral vertical rope departure

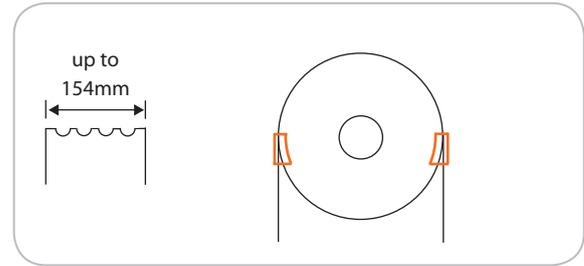

Art.no.	Finger and rope jump off protection	for traction sheave diameter
079828	FuS 300 - 470 vertical	300 - 470mm
079829	FuS 480 - 720 vertical	480 - 720mm
079830	FuS 730 - 1100 vertical	730 - 1100mm

Scope of delivery

for one vertical + one inclined rope departure

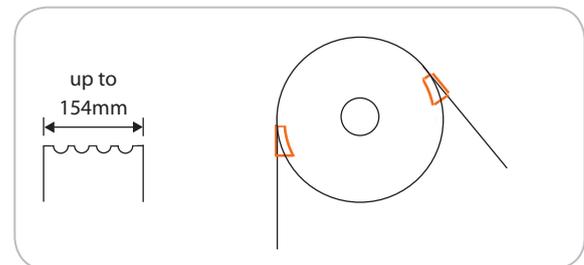


Art.no.	Finger and rope jump off protection	for traction sheave diameter
079831	FuS 300 - 470 inclined	300 - 470mm
079832	FuS 480 - 720 inclined	480 - 720mm
079833	FuS 730 - 1100 inclined	730 - 1100mm


Accessories, individual parts



Art.no.	Traction sheave extension plate up to 218mm	for traction sheave diameter
079835	FuS Tv 218/300 - 470	300 - 470mm
079836	FuS Tv 218/480 - 720	480 - 720mm
079837	FuS Tv 218/730 - 1100	730 - 1100mm

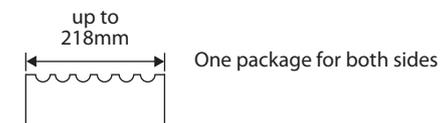

Art.no.	Heightening bent for vertical rope departure	for entering point height
079834	FuS Bent 600	up to 600mm

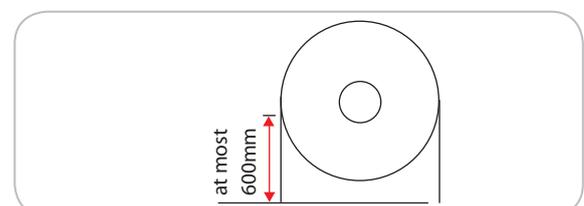

A detailed mounting instruction is included in every delivery.