

Ladder type 8 - TRI-KLAPP 115

Three-part folding pit ladder with floor attachment for universal mounting in the pit.

Construction according to EN 131-2, with the addition of ACCESSORY-SET-N according to EN 81-20, annex F, type 4.

Description





In the unfolded state the ladder length adds up to 2.56m. The ladder has to be set up in the pit with an angle of 65°-75° according to EN 131-2, so a tilting backwards is avoided.

In the pit must be a STOP switch, which has to be operated before unfolding the ladder.

Transverse mounting

Max. pit depth 1.40m

Longitudinal mounting

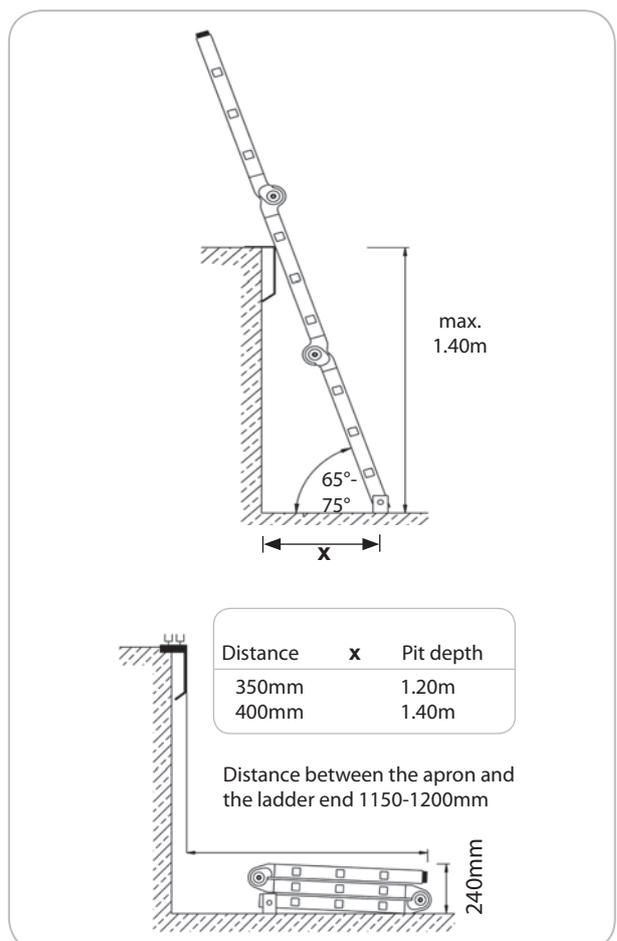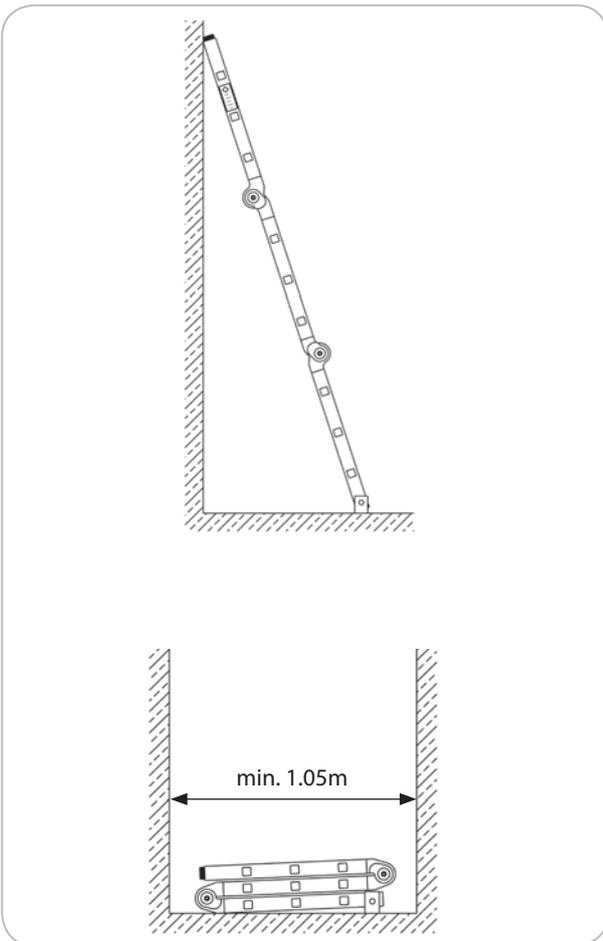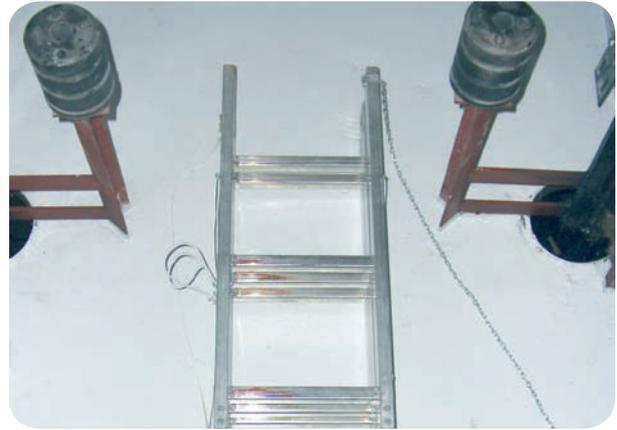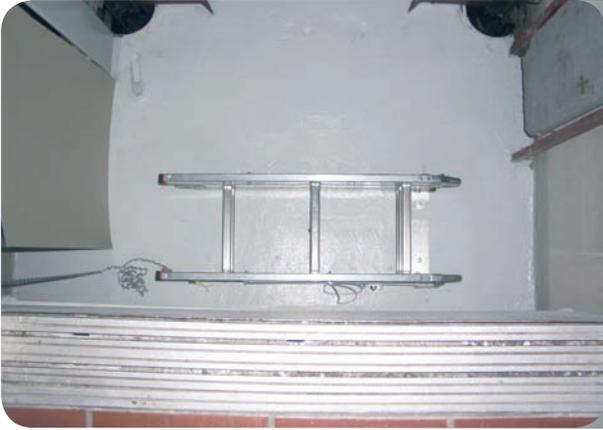


Advice:

a) According to EN 81-20 the ladder has to be so long, that the upper end or other suitable handholds reach out at least 1.10m above the landing door sill in the vertical position of the ladder.



Ladder type 8 - TRI-KLAPP 115

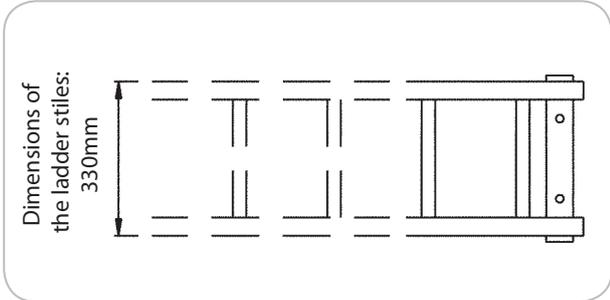

Mounting example with ACCESSORY SET-N

Pit ladder TRI-KLAPP 115

Three-part folding pit ladder with floor attachment

Art.no.	Description	max. pit depth
078589	Pit ladder TRI-KLAPP 115	1.40m

The ladder can be folded by means of a chain and pull cords, which are within reach from the shaft entrance.

Width of floor fixation clamp:
TRI-KLAPP 115 350mm

ACCESSORY SET-N to TRIKLAPP 115

Accessories to ladder type TRI-KLAPP 115
ACCESSORY SET-N for the mounting or retrofitting of a safety switch IP67 with forced actuation 1NC/NO onto the TRIKLAPP 115.

Construction acc. to EN 81-20, annex F, type 4.

Art.no.	Description
078380	Ladder ACCESSORY SET-N

