





W+W
Aufzugskomponenten
www.wwlift.de

Examples cabin ceilings:

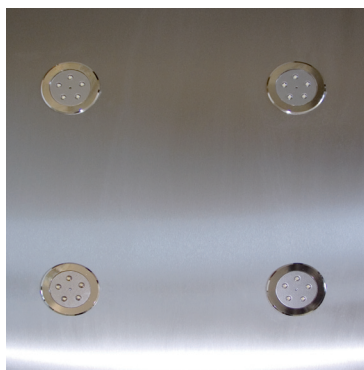

Stainless steel polished + CabinLED5-3030

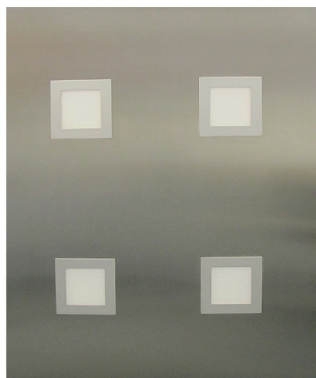

Stainless steel polished + SQUARE-LED 200x200mm



CabinLED5-3030



CabinLED5-3030-ESG



SQUARE-LED
Ø 240mm



SQUARE-LED
200x200mm



SQUARE-LED
300 x 300mm



CabinLED-NSG-24V
Art.no. 020421

ENQUIRY FORM

Special customised cabin ceilings

On this enquiry form you can configure cabin ceilings according to your wishes.

Phone +49 (0)211-73848-183 · email: vertrieb@wwlift.de

Enquiry

Customer:

Commission no.:

Dimensions

Length (max. 1190mm):

Width (max. 2000mm):

Built-up height: 40mm

**The ceiling dimension are required,
not the internal cabin dimensions**

Materials

- Stainless steel V2A, grain 240 polished / thickness = 1.5mm ☐
- Aluminium white RAL 9016 / thickness = 1.5mm ☐
- Stainless steel V2A mirror / thickness = 1.5mm ☐

Lamp selection and light colours

- CabinLED5-3030

- white 805lm / 5600K
- neutral white 830lm / 4000K
- warm white 780lm / 3000K

Number

☐
☐
☐

- SQUARE-LED Ø 240mm

- white 870lm / 6000-7000K
- neutral white 856lm / 4000-5000K
- warm white 580lm / 2700-3300K

Number

☐
☐
☐

- CabinLED5-3030-ESG

- white 805lm / 5600K
- neutral white 830lm / 4000K
- warm white 780lm / 3000K

Number

☐
☐
☐

- SQUARE-LED 200 x 200mm

- white 950lm / 6000-7000K
- neutral white 950lm / 4000-5000K
- warm white 800lm / 2700-3300K

Number

☐
☐
☐

- SQUARE-LED 300 x 300mm

- white 1100lm / 6000-7000K
- neutral white 1085lm / 4000-5000K
- warm white 720lm / 2700-3300K

Number

☐
☐
☐

Special functions

- CabinLED-NSG-24V-60W-3pol ☐

- Dimmer ☐

Switching power supply with
emergency power supply and
capacity monitoring acc. to
EN 81-28, IP33